

# 新的 Unidrive SP0型驱动器

0.37KW-1.5KW 200V /3 400V3

CT Unidrive SP0

Unidrive SP0 SP  
Unidrive SP 0.37KW 1.9MW



N1652



2  
YEAR  
Warranty



BSI  
REGISTERED  
UKAS  
CERTIFICATION  
003



BSI  
REGISTERED  
UKAS  
CERTIFICATION  
003



UL  
LISTED E171230



# 新的Unidrive SP 0型驱动器特点

- EMC
- 2 Torque off
- 24V



	mm	in
H	250	9.9
W	62	2.5
D	220	8.7

安全Torque Off (安全禁用)  
Torque Off  
EN954 3

## 规格

200~240V+/-10%  
200~240V+/-10%  
380~480V+/-10%

## 控制模式

V/f

## RFC

---

## 环境

0 40 32 104F  
50 32 122F  
40 95%  
IEC60068-2-6-64  
IEC60068-2-29  
IP20

EN61800-3 2 EN61000-6-2

EN61800-3 2

EMC EN61000-6-3 EN61000-6-4

## 通用的电机控制

## 缩短调试时间

Unidrive SP

CTsoft

## 自学习

## 零距离安装

Unidrive SP0


## 智能卡

## 额定值和订货代码

Unidrive SP0				
	/	A		
			(kW)	(HP)
200~240V /3	SP0201	2.2	0.37	0.5
	SP0202	3.1	0.55	0.75
	SP0203	4	0.75	1
	SP0204	5.7	1.1	1.5
	SP0205	7.5	1.5	2
380~480V/3	SP0401	1.3	0.37	0.5
	SP0402	1.7	0.55	0.75
	SP0403	2.1	0.75	1
	SP0404	3	1.1	1.5
	SP0405	4.2	1.5	2

40S 150% 60S 175%

## SP1型和0型驱动器功率范围比较

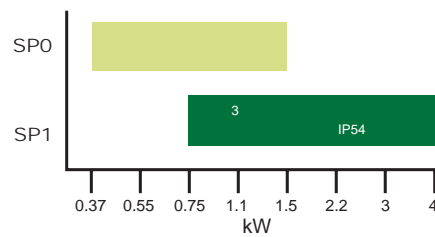

## 外部可选滤波器EMC滤波器

200V	4200-6000
200V	4200-6001
400V	4200-6002


## 其他选项

LED	SP0
	1299-0001

## 相关手册

Unidrive SP-	0175-0339
Unidrive SP PLC	0175-0328

## Fieldbus Connectivity



## Extra I/O

